

ASUS BE27ACSBK

Video Conferencing Monitor



PC mounted

Key Features



178° wide-viewing-angle IPS panel (WQHD) exudes consistent color at almost any viewing angle.



Built in adjustable 2MP 1080p webcam, mic array plus stereo speakers deliver better online communication.



Extensive connectivity of USB-C, HDMI, DP in, DP out for daisy chain, USB hub and Earphone jack



Integrates the AI Noise-Canceling Mic to eliminate almost all unwanted noise to retain only your voice clearly heard.




Face Auto Exposure technology detects your face automatically to make your face look brighter.



Support signal transmission of DisplayPort, data transmission and up to 80W power delivery via just one USB-C cable.



TÜV-certified Flicker-free/low blue light technology helps avoid eye strain for comfortable viewing experience.



Ergonomically-designed stand with tilt, swivel (+180° ~ -180°), pivot, and height adjustments



Space saving from compatible VESA mount standard (100 x 100 mm) and bundled ASUS miniPC kit(optional)






Specification

Display	Panel Size(diagonal)	27"(68.58 cm) Wide Screen (16:9)
	Display Viewing Area(HxV)	596.736 x 335.664 mm
	Panel Type	IPS
	Display Surface	non-glare
	Color Saturation	100% sRGB / 72% NTSC
	True Resolution	2560x1440
	Pixel Pitch	0.233 mm
	Brightness (Max.)	350 cd/m ²
	Contrast Ratio (Max.)	1000:1
	ASUS Smart Contrast Ratio(ASCR)	100,000,000:1
	Viewing Angle (CR _{≥10})	178°(H)/178°(V)
	Display Colors	16.7 million
	Response Time	5ms (GTG)
Video Features	Splendid™ Video Intelligence Tech.	Yes
	Skin-Tone Selection	3 modes
	Color Temperature Selection	4 modes (Cool/Normal/Warm/User)
	HDCP support	Yes (ver. 1.4)
	QuickFit	Yes
	Blue Light Filter	Yes
	Webcam (built-in)	Yes (2M 1080p; Swivel +180° ~ -135°, Tilt +10° ~ -10°)
Audio Features		Built-in Microphone(Array type) Stereo Speaker 2W x 2, RMS
Input/ Output		HDMI(v1.4) x 1, DP1.2 input x 1, DP1.2 output x 1 for daisy chain, USB-C x 1 (DP Alt mode with power delivery up to 80W), USB 3.2 Gen 1 Type-A x4, Earphone jack x 1
Signal Frequency	Digital Signal Frequency	HDMI: 30~122 KHz (H) / 48~75 Hz (V) DisplayPort, USB-C: 30~122 KHz (H) / 30~75 Hz (V)
Power	Power Consumption	<21.3 W*1
	Power Saving Mode	<0.5W
	Power Off Mode	0W(hard switch)
	Voltage	100–240V, 50 / 60 Hz
Mechanical Design	Color	Black
	Tilt(angle)	Yes (+35° ~ -5°)
	Swivel(angle)	Yes (+180° ~ -180°)
	Pivot(angle/direction)	Yes (+90° ~ -90°)
	Height Adjustment	Yes (0~150mm)
	VESA Wall Mounting	100x100mm
Security	Kensington lock	Yes
Dimension	Phys. Dimension (WxHxD)	612.4 x (441.8~547.8) x 259 mm (with stand+webcam), 612.4 x 427.3 x 56.1 mm(without stand)
	Box Dimension (WxHxD)	713 x 502 x 228 mm
Weight		8.6 Kg(Net); 5.8 kg(Net weight without stand) 11.2 Kg (Gross)
Accessories		Power cord(1.8m), HDMI cable(1.8m), USB-C cable(1.8m), DisplayPort Cable(optional), USB C to A Cable(optional), Warranty card, Quick Start Guide, mini PC kit(optional)
Compliance Standards		Energy Star®, FCC, cTUVus, ICES-3, CB, CE, ErP, WEEE, ISO 9241-307, UkrSEPRO, CU, CCC, CEL, BSMI, RCM, AU MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, e-Standby, PSB, VN MEPS, TCO, RoHS, CEC, WHQL Windows 7/8.1/10, TUV Flicker Free, TUV low blue light



*1.Measuring a screen brightness of 200 nits without audio/ USB/ Card reader connection

*.All specifications are subject to change without notice.

Outline Dimension

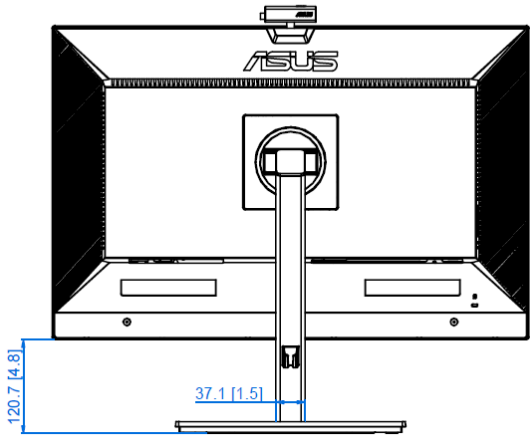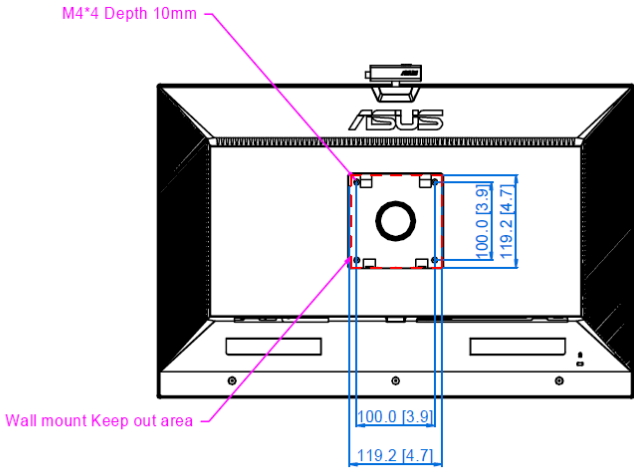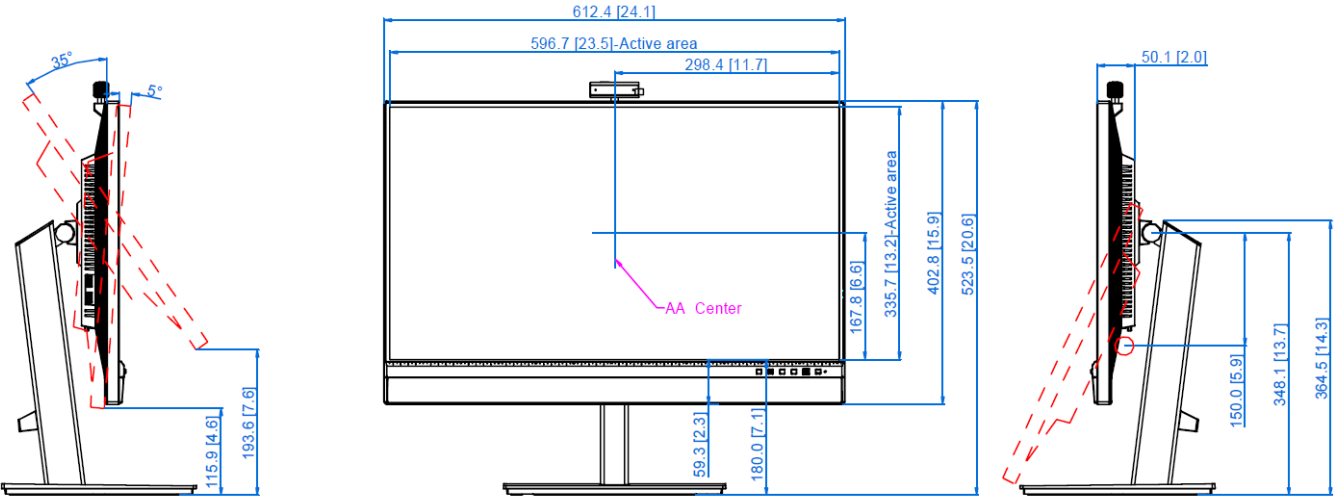

Swivel: ±180 Degree

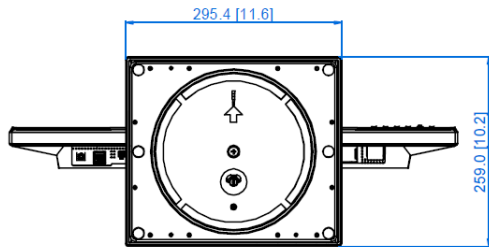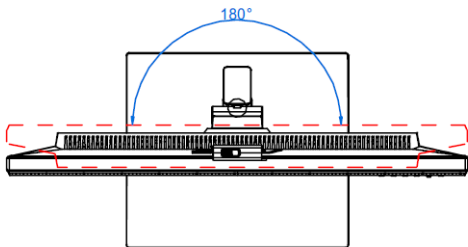

*Unit: mm(inch)