

ASUS Google Meet hardware kit

Designed to provide comprehensive solutions for video conferencing in different workspace



Smart one-touch video-conferencing solution

- Powered by 10th Generation Intel® Core™ i7-10510U
- All I/O ports are on one side of the device, simplifying setup and cable management
- The ASUS - Google Meet Compute system comes with a magnetic stand and wall mount for easy installation

Easy on your budget

- Its curated set of components work together end-to-end to make engaging HD meetings affordable and headache-free


Easy to use and support

- Each meeting has a unique, easily shareable URL, no dedicated accounts or plugins required
- Unique dial-in number and PIN associated with each meeting
- Tap-to-join dialing in Google Calendar and Google Meet make it easy to join

Easy to install, deploy and manage

- Real-time authorization and central management of meeting participants ensures conferences are secured
- The hardware kit automatically updates the firmware of all the components to guarantee the best video experience

Over view:

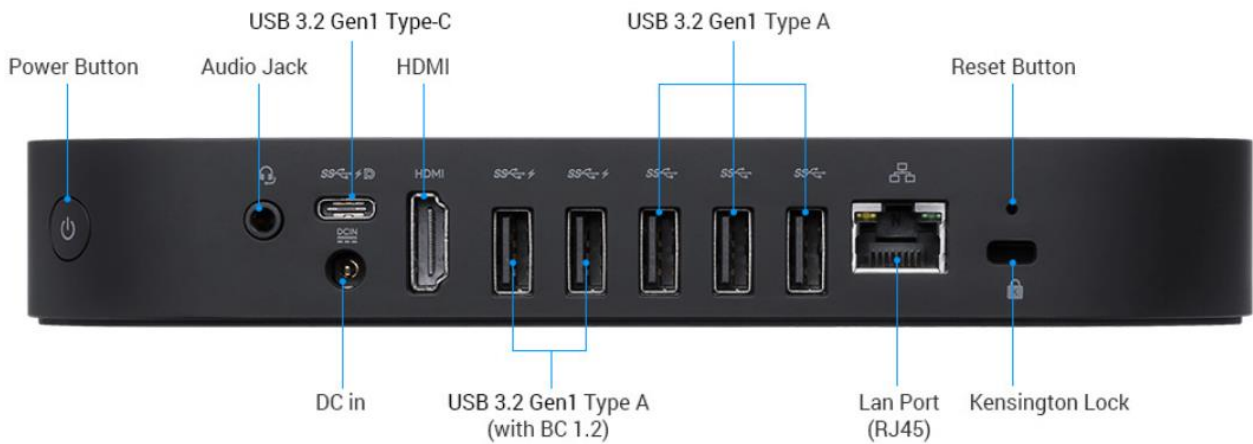

Accessories list:

Starter Kit

- ASUS – Google Meet Compute System
- UHD Camera
- Speaker Mic
- Remote Control

Small/Medium Room Kit

- ASUS – Google Meet Compute System
- UHD Camera
- Speaker Mic
- Touchscreen Control Panel

Large Room Kit

- ASUS – Google Meet Compute System
- PTZ PRO2 Camera
- Speaker Mic
- Touchscreen Control Panel

ASUS Google Meet hardware kit

Model		ASUS Google Meet hardware kit
OS		ChromeOS for Meet
CPU		Intel® Core™ i7-10510U
Chipset		Integrated
Graphics		Integrated - Intel® UHD Graphics
Memory		8GB DDR4
Storage		128GB NVMe SSD
Wireless Network		Intel® Wi-Fi 6 and Bluetooth 5.2
LAN		Intel® LAN, 10/100/1000 Mbps Supports Wake on LAN / PXE / Auto Power on / RTC Wake
Interface	Front I/O	N/A
	Side I/O	N/A
	Rear I/O	1x USB 3.2 Gen1 Type-C (5 Gbps, support DP1.4/PD in) 3x USB 3.2 Gen1 (5 Gbps) 1x USB 3.2 Gen1 (5 Gbps, support BC1.2) 1x HDMI Port 1x Intel LAN (RJ45) 1x Kensington Lock 1x DC-in 1x Recovery button
Power Supply		19Vdc, 4.74A, 90W
Physical	Dimension	198 x 123 x 29.5 mm (0.72L)
	Weight	0.67 kg
Max Resolution	HDMI	7680 x 4320 @ 60Hz
	DP	5120 x 2160 @ 60Hz
	VGA	1920 x 1080 @ 60Hz
Temperature	Operating	0°C~50°C
	Storage	-40°C~85°C
Humidity		0%~95% Relative Humidity
Acoustic	Idle mode	<25 dBA
	Full loading	<35 dBA * Test results will vary slightly depending on the HDD/SSD SKU selected by customer
Certificates		BSMI / CB / CE / FCC / UL / C-Tick / WiFi / RF / VCCI