

ASUS VA24EQSB

178° Ultra-wide View with Eye Care Monitor



Key Features



Frameless Design

Frameless, edge-to-edge design suitable for multi-display setup



IPS technology panel is optimized for the finest image and color quality with 178° wide-viewing-angle

75 Hz
Refresh Rate

Decimating blurry to gain the upper hand in current video games



Exclusive GamePlus function provides the accurate and perfect gaming experience



Extensive connectivity with HDMI and DisplayPort ports for incredible home-theater entertainment




USB Hub

Satisfies every usage with built-in USB hub and rich connectivity



Eye Care

TÜV Rheinland-certified ASUS Flicker-Free and Low Blue Light technologies



4-way Ergonomic Stand


With an ergonomically-designed stand with tilt, swivel, pivot, and height adjustments



Wall Mountable

Compatible with VESA wall-mount standard

Specification

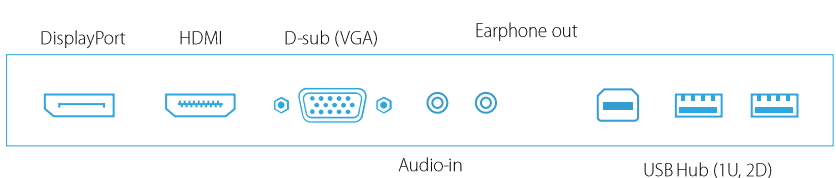Display	Panel Size : Wide Screen 23.8-inch (60.45 cm) LED backlight, 16:9 Display Viewing Area (HxV) : 527.04 x 296.46 mm Panel Type : IPS True Resolution : Full HD 1920 x 1080 Pixel Pitch : 0.2745 mm Brightness(Max) : 300 cd/m ² Contrast Ratio : 1,000:1 ASUS Smart Contrast Ratio (ASCR) : 100,000,000:1 Viewing Angle (CR \geq 10) : 178°(H)/178°(V) Color Saturation : 72% NTSC Response Time : 5ms (Gray to Gray) Display Colors : 16.7M Flicker Free : Yes	
Video Feature	Blue Light Filter : Yes Trace Free Technology : Yes SPLENDID Technology : 8 Modes (Standard / Scenery / Night View / Game / Theater / sRGB / Reading / Darkroom) Color Temperature Selection : 4 Modes (Cool / Normal / Warm / User) Skin-Tone Selection : 3 mode HDCP support : Yes, 1.4 Vivid Pixel Technology : Yes GamePlus : Yes (Crosshair / Timer / FPS Counter / Display Alignment) QuickFit : 3 modes (Alignment Grid / Document / Photo) Adaptive-Sync : 48~75Hz	
Audio Feature	2W x 2 Stereo RMS	
I/O Ports	Signal Input : DisplayPort 1.2 x 1 HDMI (v1.4) x 1 D-sub x 1 USB Hub: USB3.2 Gen1 Type-A x 2	PC audio-in: Yes, 3.5mm Mini-Jack Earphone Jack : Yes, 3.5mm Mini-Jack
		
Signal Frequency	Analog Signal Frequency : 24~84 KHz (H) / 48~75 Hz (V) Digital Signal Frequency : HDMI: 24~84 KHz (H) / 48~75 Hz (V) DisplayPort: 84~84 KHz (H) / 48~75 Hz (V)	
Power Consumption	Power on (Typical) : < 13.5W Power Saving Mode : < 0.5W Power Off Mode : < 0.3W Voltage : 100-240V, 50 / 60Hz	
Mechanical Design	Chassis Colors : Black Tilt : +35° ~ -5° Swivel : +180° ~ -180°	Pivot : 90° (Clockwise & Anticlockwise) Height Adjustment : 0 ~ 130 mm VESA Wall Mounting : 100 x 100 mm
Security	Kensington lock	
Dimensions	Phys. Dimension with Stand (WxHxD) : 540.4 x (320.8~450.8) x 211.4 mm Phys. Dimension without Stand (WxHxD) : 540.4 x 325 x 44.4 mm Box Dimension (WxHxD) : 618 x 405 x 191 mm	
Weight	Net Weight (Esti.) : 5.2 kg Net Weight without Stand (For VESA Wall Mount) (Esti.) : 3.2 kg Gross Weight (Esti.) : 7.2 kg	
Accessories	Power Cord, DisplayPort cable (optional), HDMI cable (optional), VGA cable (optional), Audio cable (optional), USB cable (optional), Warranty card, Quick Start Guide	
Compliance Standard	FCC, UL/cUL, ICES-3, CB, CE, ErP, WEEE, ISO 9241-307, UkrSEPRO, CU, CCC, CEL, BSMI, RCM, AU MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, e-Standby, Energy Star®, TCO, RoHS, WHQL Windows 7/10/11, EPEAT Bronze, TÜV Flicker Free, TÜV Low Blue Light	

* Power Consumption is measuring a screen brightness of 200 nits without audio / USB / Card reader connection

**All specifications are subject to change without notice